





Self Bunded Transportable Shuttle Tank

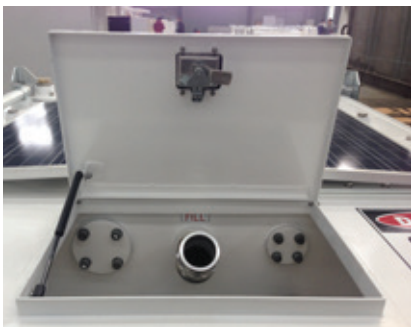

**80 NB FILL POINT WITH CAMLOC
AND CAP**

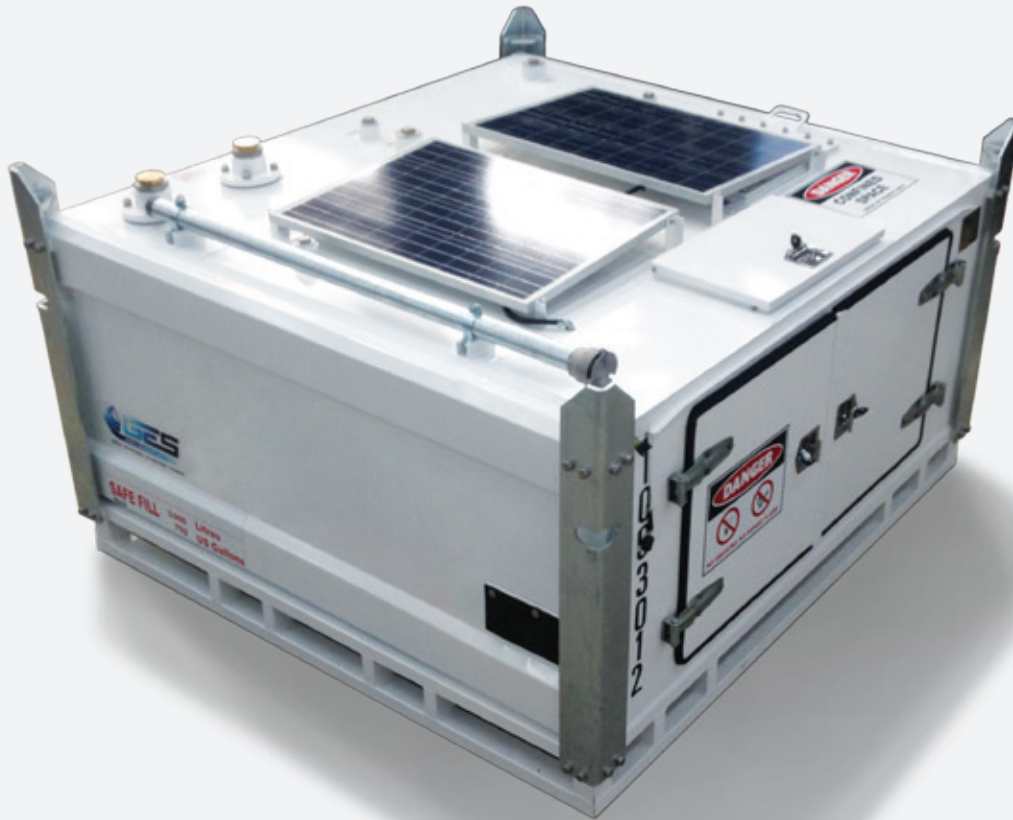


**SELF BUNDED WITH LOCKABLE
CABINET ON FRONT**





GENSET LINES AND PROVISIONS

SELF BUNDED TRANSPORTABLE SHUTTLE TANK



CERTIFICATIONS

- AS 1692-2006 Steel tanks for flammable and combustible liquids
- AS 1940-2004 The storage and handling of flammable and combustible liquids
- UL 142 Above-ground Flammable Liquid Tanks
- CAN/ULC-S601 Shop Fabricated Steel Above-ground Tanks For Flammable and Combustible Liquid
- SANS 10131 Ed. 1 (2004) Above-ground Storage Tanks For Petroleum Products

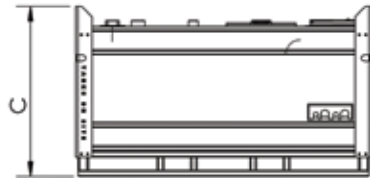

MODEL NUMBER	SAFE FILL LEVEL (L)	LENGTH A (MM)	WIDTH B (MM)	HEIGHT C (MM)	WEIGHT (EMPTY)	UNITS PER 40FT CONTAINER
TOS-1	1,000	1,645	1,130	1,320	700 KG	32
TOS-2	2,000	2,200	1,426	1,320	1,050 KG	16
TOS-3	3,000	2,300	2,209	1,320	1,400 KG	16
TOS-4	4,000	2,745	2,209	1,320	1,650 KG	8
TOS-5	5,000	3,300	2,209	1,320	1,850 KG	8

STANDARD FEATURES

- Self banded transportable with lockable cabinet on the front
- Setup for diesel or gasoline
- 80 NB fill point with Camloc and Cap
- Multiple options for drawing fuel from the tank
- Genset lines and provisions
- Forklift and crane lifting points
- Hot dipped corner posts for protection
- Stackable for transporting
- Statutory decals fitted

PUMPING OPTIONS

- 80 LPM Solar Pumping Off Grid 8MT Auto Nozzle
- 80 LPM Mains Power with Mechanical Meter
- 80 LPM Fuel Management System
- Satellite Monitor

