



AWARD Multi-Grade Automotive Engine Oils

GASOLINE ENGINE OIL

PRODUCT LINE

AWARD Multi-Grade engine oils are formulated to provide complete engine protection and meet the most current industry specifications of ILSAC GF-5 and API SN. Available in 5W-20, 5W-30, and 10W-30 viscosity grades, the Multi-Grade family of premium engine oils are designed to perform efficiently in gasoline engines and are outstanding for stop-and-go taxi fleets, city delivery vehicles and public utility fleets.

APPLICATIONS


AWARD-Multi-Grade engine oils are compatible for year-round use in gasoline, propane, ethanol E85, and Compressed Natural Gas (CNG) fueled engines. New car warranty requirements are met or exceeded where ILSAC GF-5 and API-SN engine oils are recommended. Fully backwards compatible to prior ILSAC and API ratings.

Always consult your owner's manual when selecting the appropriate viscosity grade for your engine.

PERFORMANCE BENEFITS

- Wear Protection — During severe "stop & go" service
- Oxidation Control — Resists oxidation, maintaining a cleaner oil during the drain interval
- Compatible with High Ethanol Fuels (up to E85) — Protects against engine corrosion
- Meets API SN and ILSAC GF-5

Available In These Sizes

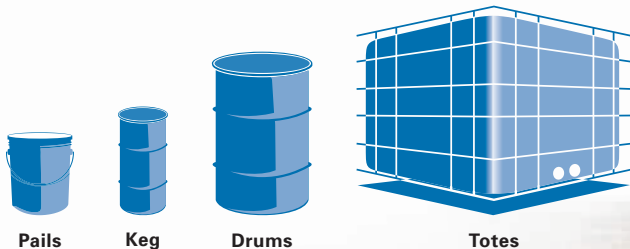

1.800.926.FUEL (3835) • AFDPetroleum.com

P: 780.438.5930 • F: 780.438.5707 • 1444 78 Avenue NW Edmonton, AB, Canada • T6P 1L7



TYPICAL PROPERTIES

SAE GRADE	5W-20	5W-30	10W-30	ASTM TEST METHOD
Viscosity @ -30°C, cP	4600	5800	N/A	D5293
Viscosity @ -25°C, cP	N/A	N/A	5800	D5293
Viscosity @ 40°C, cSt	47.00	62.00	63.00	D445
Viscosity @ 100°C, cSt	8.30	10.20	10.80	D445
Viscosity Index	155	155	170	D2270
Flash Point, COC, °C (°F)	213 (415)	213 (415)	216 (420)	D92
Pour Point, °C (°F)	-40 (-40)	-40 (-40)	-40 (-40)	D97
Color	2.0	2.0	2.0	D1500
Gravity, °API	32.0	32.0	36.0	D287
Sulfated Ash, % wt	0.98	0.98	0.98	D874
Phos., %	0.077	0.077	0.077	D4951
Zinc, %	0.085	0.085	0.085	D4951
HT/HS, cP	3.20	3.22	3.12	D4683
Total Base Number (TBN)	7.4	7.4	7.4	D2896

PERFORMANCE SUMMARY

SPECIFICATIONS AND APPROVALS	AWARD MUTLI GRADE MOTOR OILS
API Service Classification - SN, ILSAC GF-5	Yes
Chrysler MS-12007, MS-12015, MS-6395-S	Yes
Resource Conserving	Yes
Ford Motor Company - WSS-M2C945-A, WSS-M2C946-A	Yes
Honda	Yes
Toyota	Yes

Health & Safety

This product should not be used for purposes other than its intended use. If disposing of used product, take care to protect the environment.

SDS

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Material Safety Data Sheet (MSDS) are followed.

MSDS can be found at: <https://www.afdpetroleum.com/safety>

**Always consult with original equipment manufacturer's recommendations for specific performance and viscosity requirements.*

**Extending drain intervals should always be undertaken in conjunction with a regular oil analysis program.*

**Typical properties are average values only and do not constitute a specification. Minor variations that do not affect product performance are to be expected during normal manufacture, and at different blending locations.*

Product formulations are subject to change without notice.