



AWARD Synthetic Pro ATF

MULTI-VEHICLE ATF

PRODUCT LINE

AWARD Lubricants Synthetic Pro Automatic Transmission Fluid (ATF) is a next generation, fully synthetic multi-vehicle ATF. AWARD Pro ATF is specifically formulated for the newest generation of high efficiency transmissions while providing a fuel-efficient choice for older models.

APPLICATIONS


AWARD Synthetic Pro ATF is designed for use in a wide variety of applications, including all General Motors, Ford, Chrysler, Toyota/Lexus, Honda/Acura, Hyundai, Nissan/Infiniti, Jaguar, Isuzu, Land Rover, Mazda, Kia, Mitsubishi, Mercedes, BMW, Porsche, MINI, Subaru, SAAB, Volvo, and VW/Audi cars and light trucks. Always consult your owner's manual for specific recommendations.

- Not recommended for Audi and VW transmissions specifying G 055162 A1/A2/A6 or G 060162 A1/A2/A6
- Not for use in Dual Clutch Transmissions (DCT), Ford Type F, or Continuously Variable Transmissions (CVT) applications

PERFORMANCE BENEFITS

- Inventory Optimization through Multi Vehicle Use
- Superior Synthetic Base Oil Properties
- Enhanced Friction Durability
- Improved Oxidation and Thermal Stability
- Superior Anti-Wear Protection
- Improved Torque Transfer

Available In These Sizes

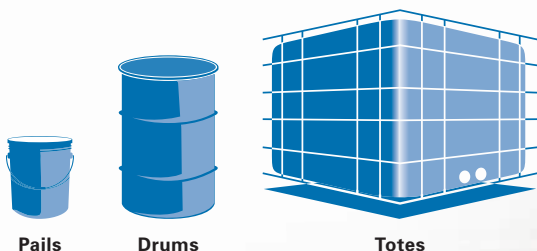

1.800.926.FUEL (3835) • AFDPetroleum.com

P: 780.438.5930 • F: 780.438.5707 • 1444 78 Avenue NW Edmonton, AB, Canada • T6P 1L7



TYPICAL PROPERTIES

PROPERTY	AWARD PRO ATF	ASTM TEST METHOD
Viscosity @ 40°C, cSt	31.00	D445
Viscosity @ 100°C, cSt	6.10	D445
Viscosity Index	150	D2270
Flash Point, COC, °C (°F)	208 (406)	D92
Pour Point, °C (°F)	-48 (-54)	D97
Color	Red	D1500
Gravity, °API	32.9	D4052

SUITABLE APPLICATIONS

ATF Type A, Suffix A AISIN WARNER A-1, 3309 ALLISON C3, C4 ALFA ROMEO AMERICAN MOTORS ATF +3, +4 ATF 3403 M115 AUDI ZF, 5HP19FL, 5HP24A, LT71141 AUDI G-052-162-A1, G052-162-A2 AUDI G-055-005-A2, G-060-162 BMW ZF, 5HP18FL, 5HP24, 5HP30 BMW LA2634, 7045E, LT71141, M-1375.4 CATERPILLAR Power Shift TO-2 CHRYSLER 7176-E, ATF +3, ATF +4 DAEWOO LT71141 ESSO LT71141 FIAT FORD Mercon, Mercon V, Mercon LV, Mercon SP, FNR5 (MAZDA), M2C138CJ M2C166-H, MC2C924-A GENERAL MOTORS 9986195, Strasbourg, 12378515 Dexron II, II-E, III, IIIG, IIIH, VI HONDA / ACURA ATF Z1, DW-1 (not CVT's) HYUNDAI SP-II, SP-III, SP-IV, SPH-IV, SP-IVM, SPH-IV IDEMITSU K17, JATCO 3100 PL085 INFINITY, MATIC-D, MATIC-J, MATIC-K ISUZU JAGUAR M1375.4, ATF 3403 M115 JASO 1-A JWS 3309 KIA SP-II, SP-III, SP-IV fluids, Red 1 LEXUS TYPE T, T-II, T-III, T-IV MAN 339 F, TYPE F, V1 MERCEDES BENZ ZF 4HP20 MERCEDES BENZ 236.1, 236.2, 236.3, 236.5, 236.6, 236.8, 236.9, 236.10, 236.12	MERCEDES BENZ NAG-1 MINI COOPER T-IV (Not CVT) MITSUBISHI Diamond SP II/III M1375.4 MOPAR AS68RC ATF MOPAR ZF 8 and 9 SPEED NISSAN Matic-D, Matic-J, Matic-K, NISSAN Matic-S OPEL PEUGEOT PORSCHE AF 5HP19FL PORSCHE ATF 3403-M115 RENAULT SAAB 3403, 3353 LA2634 SCION SHELL 3403, 3353 LA2634 SUBARU ATF, ATF-HP SUZUKI ATF 3317 TEXACO ETL-7045E TEXACO ETL-8027B, N042 TOYOTA WS VICKERS M-2950-S, I-286-S VOITH H55.6335.XX (G607) VOITH Turbo, ZF, Ecomat VOITH ZF TE-ML 09/11 VOITH ZF TE-ML 03D, 04D, 09 VOITH ZF TE-ML 16L, 17C VOLVO 97340, 1161521 VOLVO 1161540 T-IV VOLVO STD 1273.41 VW TL521-62, G-055-162, G-055-025-A2 VW G-052-162-A1, A2, G-060-162 ZF TE-ML-16L, 17C
--	--

Health & Safety

This product should not be used for purposes other than its intended use. If disposing of used product, take care to protect the environment.

SDS

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Material Safety Data Sheet (MSDS) are followed.

MSDS can be found at: <https://www.afdpetroleum.com/safety>

**Always consult with original equipment manufacturer's recommendations for specific performance and viscosity requirements.*

**Extending drain intervals should always be undertaken in conjunction with a regular oil analysis program.*

**Typical properties are average values only and do not constitute a specification. Minor variations that do not affect product performance are to be expected during normal manufacture, and at different blending locations.*

Product formulations are subject to change without notice.